


使用用途・砂利・石灰・コークス 使用範囲の広いバケット!

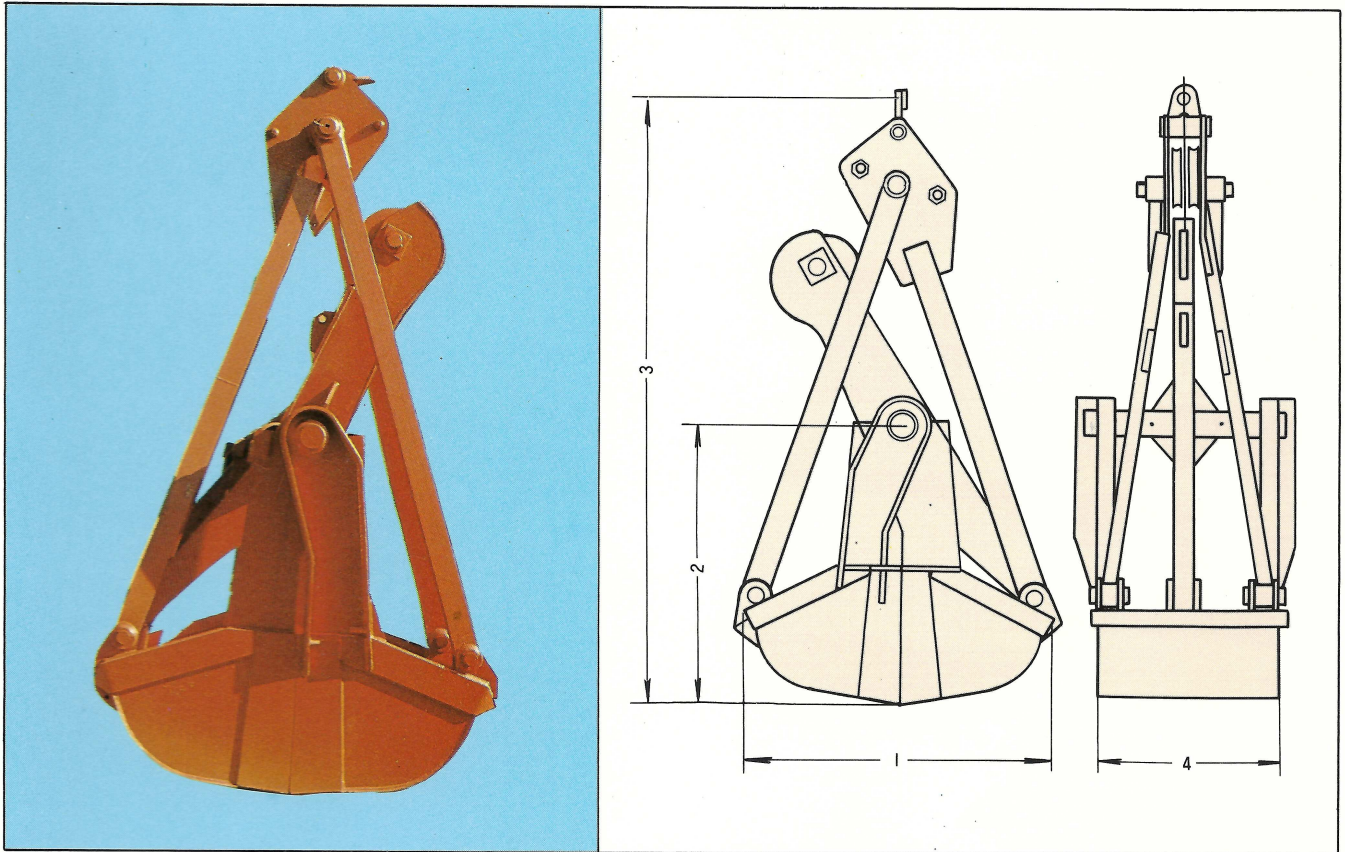

標準型ラッチアーム式バケット主要寸法表

m ³	ton	1	2	3	4
1.0	2.0	1,820	1,650	3,800	1,170
1.5	3.2	2,150	1,960	4,420	1,310
1.8	4.0	2,300	2,105	4,825	1,380
2.0	4.7	2,390	2,190	4,995	1,420
2.2	4.9	2,490	2,270	5,135	1,480
2.5	5.7	2,600	2,390	5,395	1,540
2.7	6.1	2,670	2,460	5,550	1,580
3.0	6.7	2,750	2,550	5,755	1,640
3.3	7.2	2,820	2,640	5,935	1,685
3.5	7.7	2,860	2,700	6,120	1,715
4.0	8.7	2,720	2,800	6,365	1,790
4.2	9.0	3,150	2,830	6,425	1,820
5.0	10.5	3,180	2,950	6,670	1,920
5.5	12	3,230	3,000	6,700	1,970
6.0	13.5	3,360	3,100	6,715	2,050
8.0	17	3,720	3,300	7,540	2,300

©上記仕様書以外の各種バケットも製作いたします。